


PLAN

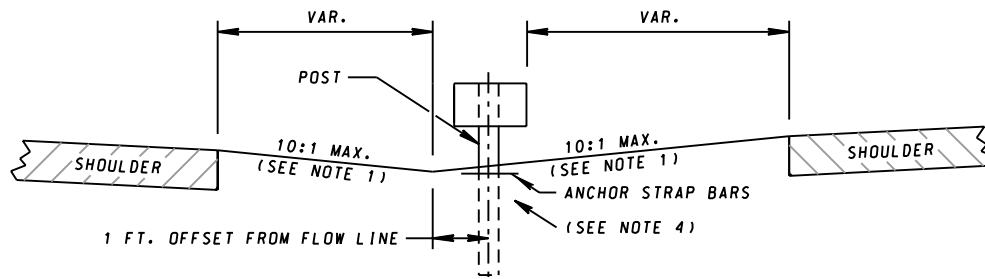

SECTION A-A

NOTES

1. 6:1 MAX GRADING IS ALLOWABLE WHEN THE BARRIER IS LOCATED 12' OR MORE FROM THE OUTSIDE EDGE OF THE SHOULDER.
2. THIS END TREATMENT CAN ALSO BE USED IN RAMP GORES OR OTHER AREAS WHERE 2 RAILS OF W BEAM COME TOGETHER AND TERMINATE WITH ONE END TREATMENT.
3. ADD DELINEATION ON END OF TREATMENT AS DIRECTED BY THE OFFICE OF TRAFFIC AND SAFETY.
4. FOUNDATION GRADING REQUIRED IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS.
5. WHEN ANCHOR STRAP BARS ARE LOCATED ON BITUMINOUS SURFACES REMOVE 3" OF BITUMINOUS INSTALL ANCHOR STRAP BARS AND COVER WITH HOT MIX ASPHALT PATCH. COST IS INCIDENTAL TO END TREATMENT.

*** THIS SYSTEM MAY ALSO BE USED AS AN ALTERNATE TO TYPE D WHEN CONDITIONS ARE EQUAL IN APPLICATION.**

SPECIFICATION 605	CATEGORY CODE ITEMS										
APPROVED <i>Kirk G. McCall</i> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT											
SHA State Highway Administration	<table> <tr> <td>APPROVAL • SHA REVISIONS</td><td>APPROVAL • FEDERAL HIGHWAY ADMINISTRATION</td></tr> <tr> <td>APPROVAL 11-10-99</td><td>APPROVAL 7-2-99</td></tr> <tr> <td>REVISED 10-1-01</td><td>REVISED 3-28-01</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> </table>	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 11-10-99	APPROVAL 7-2-99	REVISED 10-1-01	REVISED 3-28-01	REVISED	REVISED	REVISED	REVISED
APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION										
APPROVAL 11-10-99	APPROVAL 7-2-99										
REVISED 10-1-01	REVISED 3-28-01										
REVISED	REVISED										
REVISED	REVISED										

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

TYPE F TRAFFIC BARRIER END TREATMENT

STANDARD NO. MD 605.07